




PML/HY

Mulcher with swinging hammers rotor for excavators having a weight between 1.5 and 3.5 t.

Standard equipment: 8cc gear motors with integrated anticavitation valve, self-cleaning rear roller, self levelling protection rubber, possibility to have the rotor equipped with PML hammers or Y-flails.

Options: 16cc gear motors with integrated anticavitation valve, custom made attachment plate with pins, attachment plate with self leveling device.

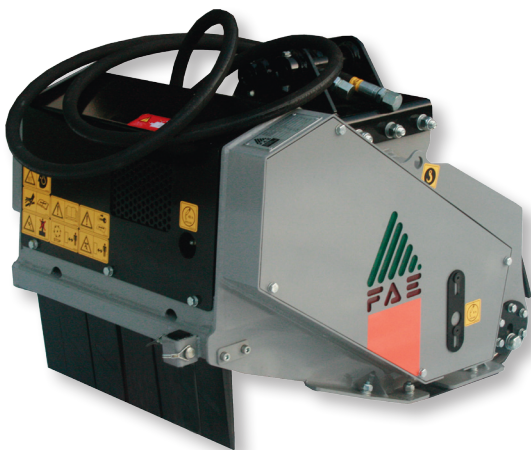

PML/HY

Model	Requirements			Exca.weight Bagger t Min - Max	Working width mm	Weight Kg	Grinding diameter mm (max)	Teeth q.ty	
	Power HP Min - Max	Flow L/min Min - Max	Pressure Bar Min - Max					hammers PML	flails Y
PML/HY 50	20 - 35	16 - 40	150 - 210	1,5 - 3,5	500	160	20	8	8
PML/HY 70	25 - 35	16 - 40	150 - 210	2,0 - 3,5	700	180	20	10	10
PML/HY 90	30 - 35	16 - 40	150 - 210	2,5 - 3,5	900	200	20	14	14

Data refers to the machine without options.



Hammer type "PML"



Hammer type "Y"

The technical data are indicative, not binding and are subject to modification without prior notice.